

ENDURA® GREASE MANAGEMENT

The First Truly Low Profile Grease Interceptor

endura®



Lo-PRO

Grease Interceptor

Canplas® is proud to introduce the Endura® Lo-PRO for those tight on-floor grease interceptor applications where space is at a premium.

Based on the same dimensional footprint as our successful 35gpm and 50gpm Endura® models, this latest 25gpm addition has an overall height of just 11 inches, and still meets the requirements of ASME112.14.3.

More importantly however the internal components can be removed in less than 6" of additional clearance making this unit a truly low profile solution.

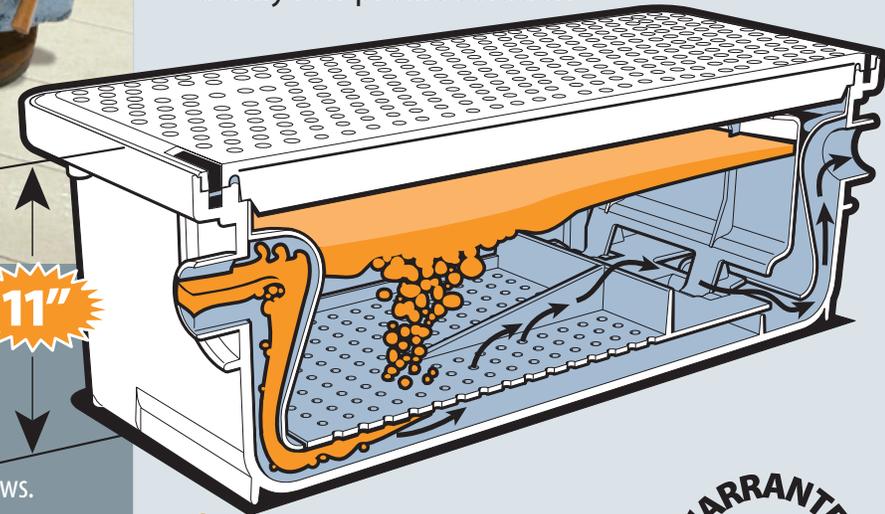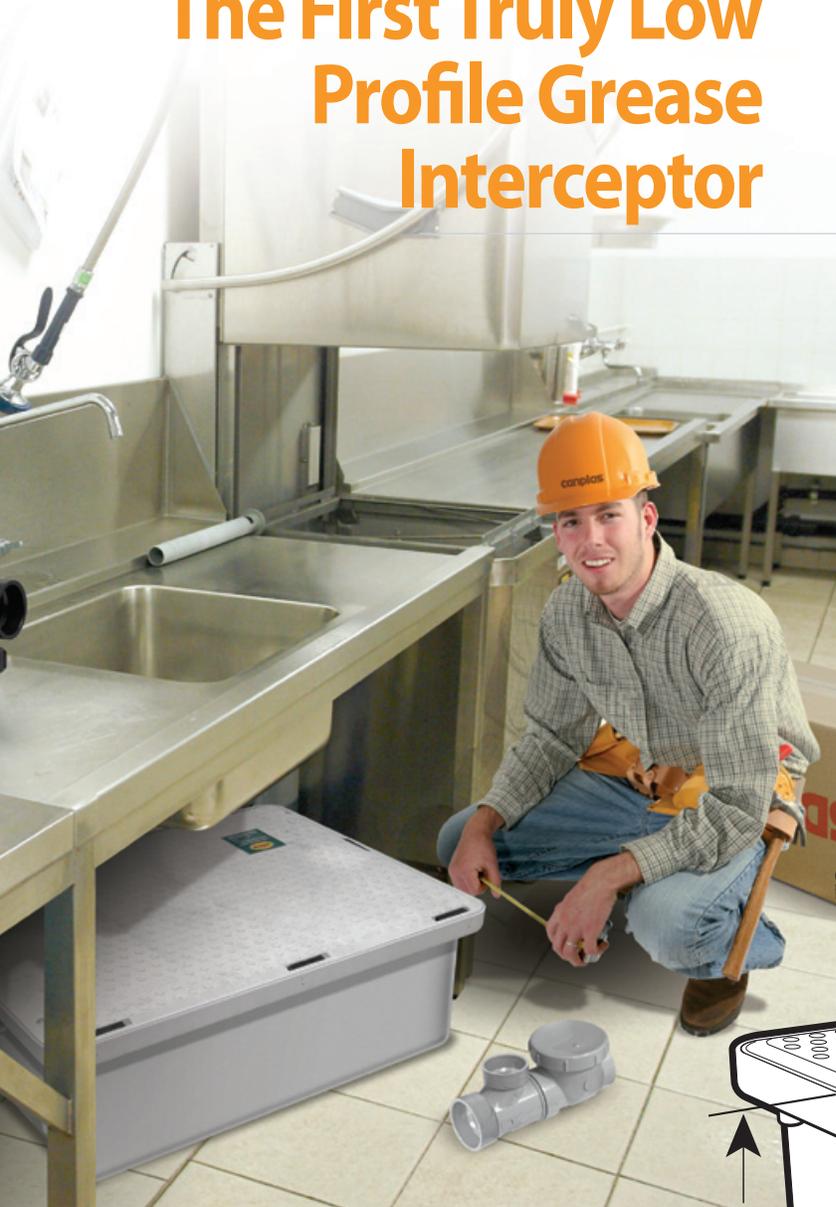

Sewer authorities and building owners spend millions of dollars every year combating grease accumulation in plumbing systems.

Grease accumulation causes sewer blockages and overflows. These overflows are a health risk to you, your employees, your customers and the general public. Injection molded in engineered thermoplastic, the Endura® Grease Interceptor provides restaurant operators the best value and performance on the market today.

11"

endurability
GUARANTEED

✓ Availability ✓ Reliability ✓ Durability

WARRANTED
10.
YEARS




ASME 112.14.3



canplas®

www.endurainterceptor.com

an OAliaxis company

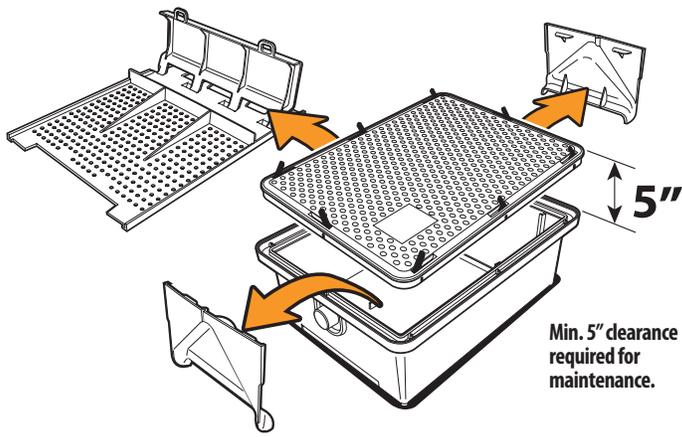

endura[®] Lo-PRO


Grease Interceptor

Contractor shall install a Canplas Endura[®] Lo-PRO Grease Interceptor, Part No. 3925A02LO. A flow control with a rate of 25 gpm will also be installed in accordance to manufacturer's instructions. The interceptor will be able to be serviced with a min. of 5" of overhead clearance. The unit shall be comprised of engineered thermoplastics to withstand operational temperatures up to 220°F (104°C) and incorporate a lid with the capability of supporting 440 lbs. (200 Kgs). The unit will be supported by a 10 year manufacturer's extended warranty. The grease interceptor shall be certified to the current version of the PDI-G101 standard and where locally applicable to ASME112.14.3 or have UPC listing. Contractor shall provide mechanical connectors to connect the grease interceptor.

DIMENSIONS

TANK



GPM/lbs	25/50 LO
A	31.0" (787mm)
B	23.5" (597mm)
C	4" (102mm)
D	7" (178mm)
E	11" (279mm)

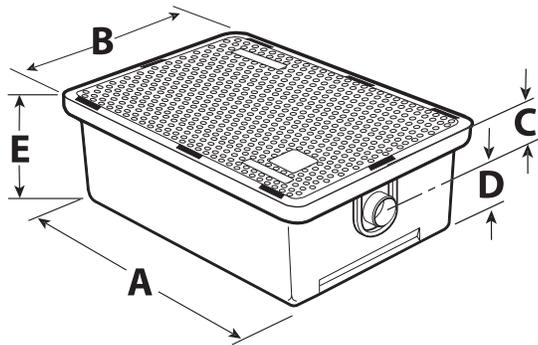

PART #	CTN. QTY.	SIZE
3925A02LO	1	2"

FLOW CONTROL

Connection Iron Pipe Size (Solvent weld)	2" h x h	AIR INTAKE
A	3.0" (76.2 mm)	2" spg x h
B	Nom. Dia. 2" (50.8 mm)	Nom. Dia. 2" (50.8 mm)
C	-	Nom. Dia. 1.5" (38.1 mm)
D	3.84" (97.5 mm)	-



CAPACITY


US Gallons Per Minute (GPM)	25 LO
CAPACITY - Pounds	50

Litres Per Second (LPS)	1.6
CAPACITY - Kilograms	22.68

Average Efficiency % (ASME 112.4.3)	97.1%
Part Number	3925A02LO
Grease Capacity lbs (Kg) actual	53.4 (24.22)
Operating Temperature Capabilities	220°F (104°C)
Surface Load Capacity	440 lbs (200 kgs)
Unit Weight (Empty)	23.9 lbs (10.85 kgs)
Liquid Capacity	18.9 gal (71.54L)
Connection size (mechanical) (110 mm available on request)	2"

Components for: Lo-PRO Grease Interceptor

ITEM	Description	Part No
1A	- Latches (left)	#3935A-6LH2
1B	- Latches (right)	#3935A-6RH2
2	- Reinforced polypropylene cover	#3935A-2
3	- Rubber gasket	#3935A-5
4	- Removable polypropylene baffles	#3925A02LO-3
5	- Diffuser Baffle	#3925A02LO-6A
6	- One-piece tank	#3925A02LO-1

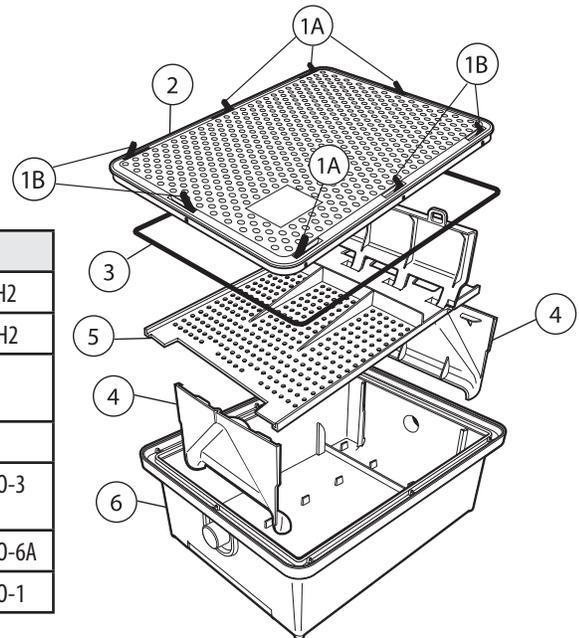

Suppliers Address

Canplas Industries Ltd.
P.O. Box 1800, 500 Veterans Drive
Barrie, Ontario, Canada L4M 4V3
Tel: (705) 726-3361
Toll Free: 1-800-461-5300
Fax: (705) 726-2186

Canplas LLC
11402 East 53rd Ave.
Suite 200, Denver, CO, U.S.A. 80239
Tel: (303) 373-1918
Toll Free: 1-888-461-5307
Fax: (303) 373-1923